

**10/089440****TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**INTERNATIONAL APPLICATION NO.  
**PCT/GB00/03752**INTERNATIONAL FILING DATE  
**29 September 2000**PRIORITY DATE CLAIMED  
**1 October 1999**

TITLE OF INVENTION

**MAGNETIC TAGS**

APPLICANT(S) FOR DO/EO/US

**DAMES et al**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The U.S. has been elected by the expiration of 19 months from the priority date (Article 31)
5. A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ has been communicated by the International Bureau
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☐ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has **NOT** expired.
  - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3))
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11 To 20 below concern document(s) or information included:**

1. ☐ An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98
2. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included
3. ☐ A FIRST preliminary amendment.
4. ☐ A SECOND or SUBSEQUENT preliminary amendment
5. ☐ A substitute specification.
6. ☐ A change of power of attorney and/or address letter
7. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter 2 and 35 U.S.C. 1.821-1.825
8. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4)
9. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
10. ☐ Other items or information

APPLICATION NO. (If known, see 37 C.F.R. 1.440) **10/00 57 440** INTERNATIONAL APPLICATION NO  
**Unassigned** **PCT/GB00/03752**

ATTORNEY'S DOCKET NUMBER  
**604-631**

☒ The following fees are submitted

**BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5):**

- Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$1040.00
- International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO. .... \$890.00
- International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO ..... \$740.00
- International preliminary examination fee (37 C.F.R. 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$710.00
- International preliminary examination fee (37 C.F.R. 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4). .... \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

**CALCULATIONS PTO USE ONLY**

\$ 890.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☒ 30 months from the earliest claimed priority date (37 C.F.R. 1.492(e)).

\$ 130.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total Claims	15	-20 = 0	X \$18.00
Independent Claims	1	-3 = 0	X \$84.00
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			\$280.00

\$ 0.00

**TOTAL OF ABOVE CALCULATIONS = \$ 1020.00**

☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.

0.00

**SUBTOTAL = \$ 1020.00**

Processing fee of \$130.00, for furnishing the English Translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 C.F.R. 1.492(f)).

0.00

**TOTAL NATIONAL FEE = \$ 1020.00**

Fee for recording the enclosed assignment (37 C.F.R. 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). **\$40.00** per property

0.00

Fee for Petition to Revive Unintentionally Abandoned Application (\$1280.00 - Small Entity = \$640.00)

0.00

**TOTAL FEES ENCLOSED = \$ 1020.00**

Amount to be:

refunded \$

Charged \$

- a. ☒ A check in the amount of \$1020.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. 14-1140 in the amount of \$\_\_\_\_\_ to cover the above fees. A duplicate copy of this form is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 14-1140. A duplicate copy of this form is enclosed.
- d. ☒ The entire content of the foreign application(s), referred to in this application is/are hereby incorporated by reference in this application.

**NOTE:** Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)), must be filed and granted to restore the application to pending status.

**SEND ALL CORRESPONDENCE TO:**

NIXON & VANDERHYE P C  
 1100 North Glebe Road, 8<sup>th</sup> Floor  
 Arlington, Virginia 22201-4714  
 Telephone: (703) 816-4000  
 LCM:lks

SIGNATURE

**Leonard C. Mitchard**

NAME

**29,009**

March 29, 2002

REGISTRATION NUMBER

Date

10/089440

JC10 Rec'd PCT/PTO 29 MAR 2002

## Magnetic Tags

### Field of the Invention

This invention relates to the field of magnetic tags for storing data, particularly but  
5 not exclusively to tags in which data is stored by reference to a combination of  
magnetic element characteristics.

### Background

PCT publication number WO99/35610 describes tags and reader systems primarily  
10 intended for tags fabricated from magnetic material of low coercivity, with elements  
at different orientations, in which data is recorded primarily by means of the  
orientation of the elements with respect to each other. The described system  
assumes that the coercivities of the tag elements are all the same, and are very small  
compared to the interrogation field.

15

Co-pending application no. PCT/GB00/03092, which is incorporated herein by  
reference in its entirety, describes a reading system for decoding magnetic tags  
including tags according to the present invention.

### 20 Summary of the Invention

According to the invention, there is provided a magnetic tag for storing data,  
comprising at least one magnetic element configured such that the data is stored by  
reference to a combination of two or more characteristics associated with the or  
each element.

25

Advantageously, a first one of the characteristics can be used to identify or  
distinguish the elements from one another and a second one of the characteristics  
can be used to store data. One or more further characteristics can be used to store  
additional data.

30

There is no limit on the type of characteristic which can be used and it can be any  
measurable magnetic property or parameter such as location of an element or  
presence or absence of an element. The characteristics can include one or more

selected from element coercivity, element bias, element orientation, amplitude  
response of an element, response bandwidth, dependence of element switching field  
in response to the rate of change of an applied field, element switching speed,  
element location, maximum cross-field bias, permeability, Barkhausen response and  
5 resonant frequency.

The magnetic tag can comprise a plurality of magnetic elements, each of the  
magnetic elements being disposed in a different orientation by which it is  
distinguishable from the other elements and each having a magnetic bias member  
10 capable of assuming a plurality of states, wherein data is stored by the state assumed  
by the magnetic bias member. Further data can be stored by the orientation of each  
of the elements being selected from a set of possible orientations. Additional data  
can also be stored by arranging for one or more of the elements to exhibit a  
different coercivity and/or a different amplitude response from that of the other  
15 elements.

The magnetic tag can alternatively comprise a plurality of intersecting magnetic  
elements, each of the magnetic elements being disposed in a different orientation by  
which it is distinguishable from the other elements and each having a coercivity  
20 selected from a set of possible coercivities, whereby to store data. The relative  
orientations of the elements can be used to identify the elements and to store data,  
and the coercivities of the elements can be used to store further data.

Yet further, the magnetic tag can comprise a plurality of magnetic elements, each of  
25 the magnetic elements being disposed in a different orientation by which it is  
distinguishable from the other elements and each being located at one of a plurality  
of possible locations whereby to store data.

The magnetic tag can also comprise a plurality of magnetic elements, each of the  
30 magnetic elements being located at one of a plurality of possible locations and each  
having a coercivity which is selected from a set of possible coercivities, whereby to  
store data.

1. More than one property varies between elements, for example selected from orientation, bias, response amplitude (i.e. saturated dipole moment), coercivity and location (or presence/absence) of an element.
2. One parameter is used to distinguish the element, and one or more other parameters are used to store the data.
3. The number of bits of data per magnetic element is greatest.

The embodiments described below do not represent the ultimate data capacity of the tag. The data capacity can be maximised by using more elements, by varying more properties, and by increasing the resolution of the reading system to  
5 distinguish between more states, for example, closer orientations or similar amplitude. In general terms, the more complex the tag becomes, the less robust the reading system becomes. In the general case where there are  $n$  different elements, and  $m$  different states for each element, in total there are  $m^n$  different possible states. There are  $2n$  ambiguities related to which way up the tag is, and which  
10 element is which, leading to  $m^n / 2n$  possible states. The achievable data density is about 100 bits of data.

A first example of the invention is described with reference to Figure 1. A plurality of magnetic elements 1-21 are arranged on a substrate 22, each at a different  
15 orientation, and each with a different bias field. The orientation is used to identify and distinguish the elements, and the bias state of each element is used to store data. Each element occupies a different position on the tag. In the simplest implementation, no information is stored in the position, coercivity or amplitude or by reference to any other properties.

20 Each element consists of a  $9 \times 9 \text{ mm}^2$  square of soft magnetic material, for example, Atalante™ thin film material (manufactured by IST of Zulte, Belgium, part number SPR97017A). This material has an "easy" axis of magnetisation, which provides a nominal orientation or direction for the element, or, in other words, the material  
25 exhibits a directional response to an applied magnetic field. Directly on top of each element is placed a layer of a hard magnetic material, for example, ferric oxide recording tape, with a coercivity of 24 kA/m, and a film thickness of  $10 \mu\text{m}$ . This magnetic material is anisotropic, and the axis of magnetisation is aligned with that of the soft material.

30 The elements 1-21 are arranged on a square grid with a pitch of 10mm. Each element 1-21 is rotated to a different angle, as shown in the following table.

Element	Angle
1	0°
2	8°
3	16°
4	24°
5	32°
6	40°
7	48°
8	56°
9	64°
10	72°
11	80°
12	88°
13	96°
14	104°
15	112°
16	120°
17	128°
18	136°
19	144°
20	152°
21	164°

Table 1

The magnetic recording film can be in one of four states: unmagnetised; magnetised  
 5 parallel to the nominal direction of the element; magnetised at 180° to the nominal  
 direction of the element; or magnetised with an AC waveform to produce a  
 magnetisation pattern at a pitch of, for example, 1.8mm. This final state has the  
 effect of turning the element "off", i.e. preventing it from generating any response  
 in the interrogation field. Each element therefore has four states, and can store 2  
 10 bits of data.

The angular gaps between the last two elements 20, 21, and between the last element 21 and the first element 1 are 12 and 16 degrees respectively. All the other elements are at 8 degrees with respect to their neighbours. In a reader system for the tag, the two larger gaps provide a reference mark, so that the elements can be correctly ordered.

The total number of bits that can be stored by the tag is  $2 \times 21 = 42$  bits. The total amount of useful data that can be stored is slightly less: one bit of data is lost because there is an ambiguity whereby all the elements are magnetised the other way around. In addition, a number of states are not allowed. These are states in which all the elements are turned off (the extreme case), and more generally states in which the first and final two elements 1, 20, 21 are turned off, as this prevents correct identification of the elements. Thus, a conservative figure for the total amount of useful data that can be stored is 40 bits.

The tag is read, in the simplest case, using a rotating magnetic field of around 2.5 kA/m. At this interrogation field, magnetising the film moves the position of the transitions by about  $1^\circ$ .

The tag can be made more compact by placing the lower two rows (elements 1-10) on top of the upper two rows (elements 12-21). This is because the elements above each other are orthogonal.

There are a number of programming methods for the above described tag, starting from a fully demagnetised tag, for example:

1. A gapped "recording head", similar to those used for standard magnetic tape, is used to magnetise the tape;
2. A small permanent magnet is used to magnetise the recording film in either direction. AC magnetisation can be achieved using a magnet with alternate north-south magnetisation;



In the examples described above, most of the angular gaps between elements are identical. More data is coded by allowing these gaps to be unequal. For example,



angles to each other. Data is stored primarily by the coercivity of the wire, and by the angles between the wires.

In this embodiment, illustrated in Figure 4, there are 7 magnetic elements 23-29.

- 5 Each element is a glass-coated amorphous metal wire, 29mm long, with a metal core diameter of around 10  $\mu\text{m}$ , and an overall diameter of around 25  $\mu\text{m}$ , made, for example, by the Taylor-Ulitovsky method. See for example M. Vazquez, A.P. Zhukov : "Magnetic properties of glass-coated amorphous and nanocrystalline microwires" : J. Magn. Mat. 160(1996) 223-228, and J. Gonzalez, N. Murillo, V.
- 10 Larin, J.M. Barandiaran, M. Vazquez, A. Hernando: "Magnetic bistability of glass-covered Fe-rich amorphous microwire: influence of heating treatments and applied tensile stress": Sensors and Actuators A 59(1997) 97-100. This material is magnetically bistable, with nearly rectangular B-H characteristics and rapid switching characteristics. Alternatively, the elements can be constructed from other
- 15 forms of wire, ribbon or film, such as cold-drawn amorphous metal wire, for example type 5T, a Barkhausen wire manufactured by Unitaka, Japan. Suitable materials are available from a number of other manufacturers (e.g. Vacuumschmelze, Germany, Allied Signal, Four Winds Inc., USA). In general terms, suitable materials exhibit rapid switching transients in fields changing at
- 20 more than 100,000 A/m/s, the field level at which these switching transients occur ("coercivity") depends on the material type and a number of different coercivities of material are available.

- The elements are chosen from a set of 7 different coercivities in the range, for
- 25 example, 20-300 A/m. These coercivities are denoted A-G in the following description, with, for convenience, A as the lowest and G as the highest coercivity. The 7 elements are disposed on a substrate 30, at different angles to each other. In the preferred configuration, the elements do not bisect. This is to avoid effects where the tag elements are deformed by all crossing at the same point. The
- 30 preferred configuration also minimises element-element interactions, and keeps the thickness of the tag to a minimum.

5

10

<i>Value</i>	<i>Degrees</i>
0	10
1	15
2	20
3	25
4	30
5	35

15

25

The tag elements can be unambiguously identified simply by finding the largest gap, and working out which way round to read the tag - i.e. starting with the smaller of the three gap sequences.

- 5 Once the tag elements have been identified individually as described, further data can be stored and retrieved by measuring other specific properties of each element. In the preferred embodiment, this is simply the coercivity of the element. A 7-digit base-7 number can be constructed from the elements taken in a specific order, by assigning A=0, B=1, C=2 ... G=6. For example, the combination of wires  
10 ABCDEFG would correspond to the base-7 number 0123456, i.e. 22875 decimal. To generate the complete tag code, this number is multiplied by 10,000 and added to the value from the angular arrangement. There are about 33 bits of data in this arrangement.
- 15 The data storage capacity of the coercivity/angle tag described above can be increased in a number of ways. One way to increase the data content is to use more elements. For example, using 9 elements instead of 7, 1,000,000 different angular arrangements can be generated, and  $9^9 = 387420489$  states can be stored by coercivity, giving a total data content of about 48 bits.
- 20 A further way of increasing data content is to select the wires from a wider range of material types. If there are more types of magnetic material to choose between, then more data can be stored per wire. For example, 8 different states stores 3 bits/wire; 16 states stores 4 bits/wire. It quickly becomes impractical to increase  
25 the number of coercivity states above about 20 states. However, many other properties vary between different types of material. For example, certain types of wire show a dependence in switching field on the rate of change of the applied field  $dH/dt$ , depending on the conditions of manufacture. This dependence can differ strongly, even for wires of very similar coercivity. Similarly, material switching  
30 speeds and switching amplitudes can also vary independently from each other and the coercivity. Switching speeds generally depend on the material construction (for example, glass-coated wire, cold-drawn wire, thin-film and so on), whereas amplitude can also be altered by changing the physical properties of the element, for

example, its length, or for thin-film materials, its width. Each of these differences can be combined to enumerate many more different material types - for example:

	Coercivity:	3 bits	(8 coercivities)
5	dH/dt	1 bit	(e.g. little/large variation)
	Speed:	1 bit	(e.g. fast/slow switching)
	Amplitude:	1 bit	(e.g. high/low amplitude)

Even with relatively simple discrimination between two states (=1 bit), for each  
 10 additional property, the data stored by each element can be increased by 3 bits (i.e. approximately doubled to 64 states/element). Applying this to the 7-element tag described above, the data capacity becomes  $10,000 \times 64^7 = 55$  bits. For the 9-element tag, the data capacity becomes about 74 bits. For an  $n$ -element tag, with  $m$  states per element, the material-encoded part of the tag data is constructed most  
 15 easily as an  $n$ -digit base- $m$  number. This is added to the angle-encoded part in a similar way to that described above.

For tags where elements overlap each other, little data can be stored by adding bias to the tag - this technique is only generally applicable if the elements are physically  
 20 separated.

Another particularly favourable arrangement is one in which data is stored by a combination of angle and location.

25 A simple tag consists of a 2D grid, for example, 5x5 locations, 31, as illustrated in Figure 5. A limited number of magnetic elements are arranged on this grid, for example, 7. The elements are disposed at angles relative to each other, in exactly the same way as the coercivity/angle embodiment described above. With 7 elements, about 10,000 different angular arrangements can be stored and each  
 30 element uniquely identified. The elements can be constructed from a wide range of magnetic wires, ribbons and films. The general requirement is that the element displays a relatively rapid and detectable switching transient in fields changing at more than 100,000 A/m/s. A low-cost embodiment uses 9x9mm squares of soft



It is particularly favourable to manufacture tags with amorphous wire elements where the elements are kept parallel, because this allows the wires to be incorporated into a moving web using standard available equipment. This can also facilitate the use of a simpler reader configuration. Suitable magnetic materials are, for example, bistable glass-coated amorphous metal wires, as described above, or Barkhausen wires.

Figure 6 shows a tag 33, which appears similar to a bar code, constructed from a series of, (in this example) 7 different parallel wires, 34, 35, each 30 mm long, with a choice of, for example, 25 locations at spaced at 2mm intervals, giving a rectangular tag around 30x50mm. The different wire types are used to identify the elements, and data is stored by the location of each element. Using 7 elements, about 26 bits of data can be stored, since one element 34 is assumed to be in a fixed location. Using 9 elements, about 34 bits of data can be stored. Again, data capacity can be increased by selecting the actual elements from a larger pool of available elements, which may differ in amplitude, switching speed or dH/dt variation, or any other measurable magnetic properties.

Combinations of different properties, numbers of allowable states, or numbers of elements are not limited to the embodiments described above. Many factors affect the exact choice of properties to combine in the tag, including the cost of the tag, the size, the required data capacity, the geometry of the reader, the available materials, and the reading environment.

Similarly, the methods used to convert the tag parameters into numeric values are not limited to the methods described in the embodiments above.

Additional discrimination between elements is possible using properties including:

1. Permeability
2. Dependence of switching properties on cross-field bias
3. Barkhausen percentage response as a function of rate of change of field
4. Resonant frequency of magnetostrictive materials



WO 01/26049

PCT/GB00/03752

- 15 -

Any of the properties, individually or together with any of the other properties described in this disclosure, can be used to increase the number of states for each element, and hence the total data encoded by the tag.

## Claims

1. A magnetic tag for storing data, comprising at least one magnetic element configured such that the data is stored by reference to a combination of two or more characteristics associated with the or each element.
- 5 2. A magnetic tag according to Claim 1, wherein a first one of the characteristics is used to distinguish the or each element and a second one of the characteristics is used to store data.
3. A magnetic tag according to Claim 2, wherein a further one or more of the characteristics are used to store additional data.
- 10 4. A magnetic tag according to Claim 1, wherein the two or more characteristics include one or more selected from element coercivity, element bias, element orientation, amplitude response of an element, response bandwidth, dependence of element switching field in response to the rate of change of an applied field, element switching speed, element location, maximum cross-field bias, permeability, 15 Barkhausen response and resonant frequency.
5. A magnetic tag according to Claim 1, in which two or more bits of data are stored by the or each element.
6. A magnetic tag according to Claim 1, comprising a plurality of magnetic elements, each of the magnetic elements being disposed in a different orientation by 20 which it is distinguishable from the other elements and each having a magnetic bias member capable of assuming a plurality of states, wherein data is stored by the state assumed by the magnetic bias member .
7. A magnetic tag according to Claim 6, in which the orientation of each of the elements is selected from a set of possible orientations, whereby to store additional 25 data.

8. A magnetic tag according to Claim 6, in which one or more of the elements is arranged to exhibit a different coercivity, whereby to store additional data.
9. A magnetic tag according to Claim 6, in which one or more of the elements is arranged to exhibit a different amplitude response from that of the other elements,  
5 whereby to store additional data.
10. A magnetic tag according to Claim 9, wherein the effective dimensions of one or more of the elements is different from that of other elements to produce a variation in amplitude response.
- 10 11. A magnetic tag according to Claim 1, comprising a plurality of intersecting magnetic elements, each of the magnetic elements being disposed in a different orientation by which it is distinguishable from the other elements and each having a coercivity selected from a set of possible coercivities, whereby to store data.
12. A magnetic tag according to Claim 11, wherein the relative orientations of the elements are used to identify the elements and to store data, and the coercivities of the  
15 elements are used to store further data.
13. A magnetic tag according to Claim 11, wherein the intersecting elements are arranged such that they do not bisect one another.
14. A magnetic tag according to Claim 1, comprising a plurality of magnetic  
20 elements, each of the magnetic elements being disposed in a different orientation by which it is distinguishable from the other elements and each being located at one of a plurality of possible locations whereby to store data.
- 15 25 15. A magnetic tag according to Claim 1, comprising a plurality of magnetic elements, each of the magnetic elements being located at one of a plurality of possible locations and each having a coercivity which is selected from a set of possible coercivities, whereby to state data.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 April 2001 (12.04.2001)

PCT

(10) International Publication Number  
**WO 01/26049 A1**

(51) International Patent Classification<sup>7</sup>: G06K 19/06

(74) Agent: VENNER, SHIPLEY & CO.; 20 Little Britain,  
London EC1A 7DH (GB).

(21) International Application Number: PCT/GB00/03752

(22) International Filing Date:  
29 September 2000 (29.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
9923199.5 1 October 1999 (01.10.1999) GB

(71) Applicant (for all designated States except US): SENTEC  
LTD. [GB/GB]; Terrington House, 13-15 Hills Road, Cam-  
bridge CB2 1GE (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,  
DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,  
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,  
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ,  
PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT,  
TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): DAMES, Andrew,  
Nicholas [GB/GB]; 74 De Freville Avenue, Cambridge  
CB4 1HU (GB). ENGLAND, James, Mark, Carson  
[GB/GB]; 44a Butt Lane, Milton, Cambridge CB4 6DG  
(GB).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: MAGNETIC TAGS

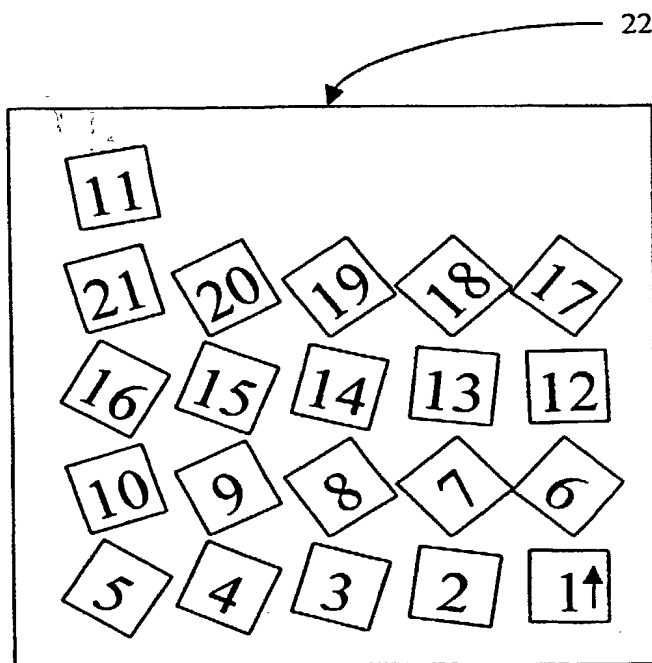

(57) Abstract: A magnetic data tag comprises a plu-  
rality of magnetic elements in which data is stored  
by reference to a combination of characteristics se-  
lected from a large number of possible characteris-  
tics. One characteristic such as orientation or loca-  
tion is used to distinguish elements from one another  
and another characteristic such as coercivity or am-  
plitude response is used to store multiple bits of data  
per element. Further characteristics are used to store  
additional data.

WO 01/26049 A1

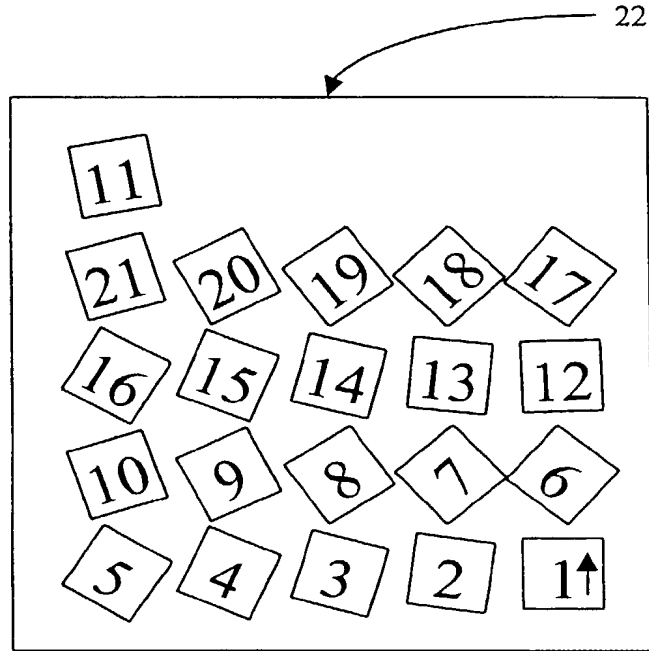


Figure 1

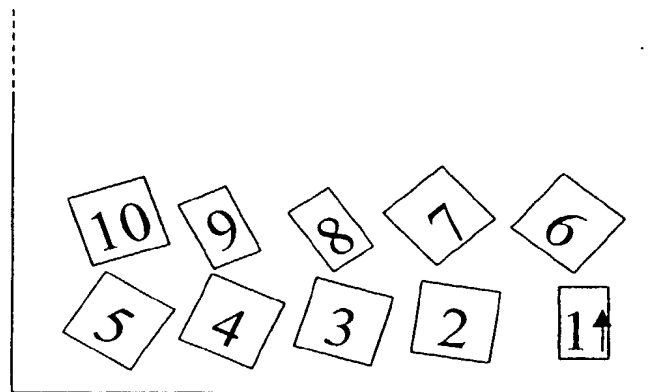


Figure 2

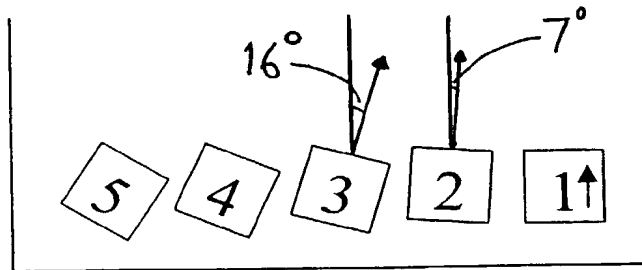


Figure 3

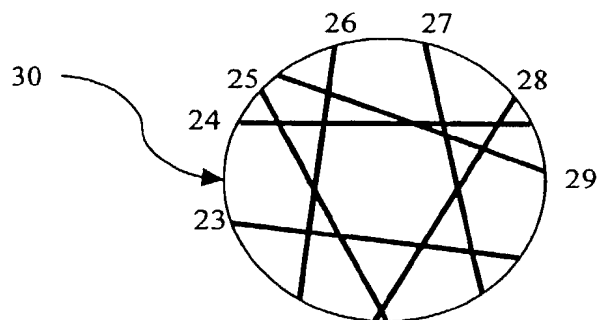


Figure 4

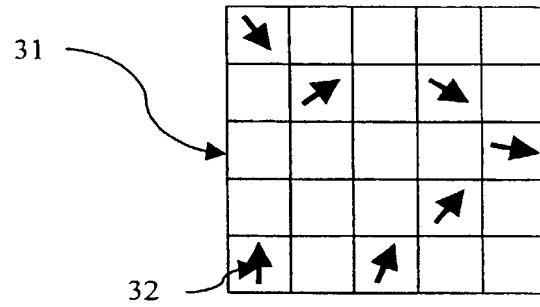


Figure 5

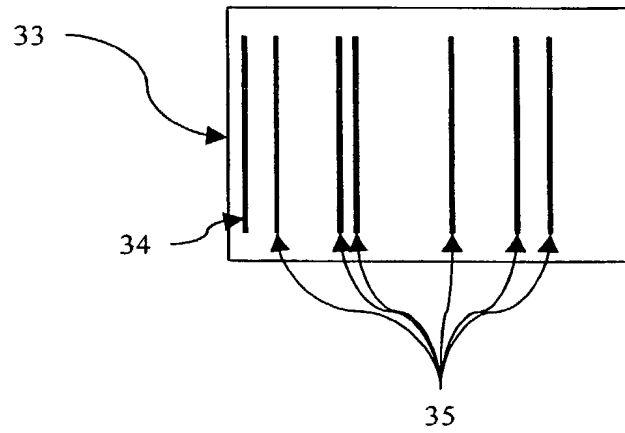


Figure 6

143954

**APPLICATION FOR UNITED STATES PATENT**  
**Declaration and Power of Attorney**

As a below named inventor, I hereby declare: THAT my residence, post office address and citizenship are as stated below next to my name; THAT I verily believe I am an original, joint inventor of the invention entitled: MAGNETIC TAGS described and claimed in the attached specification; THAT I have reviewed and understand the contents of the above identified specification, including (to the best of my ability) the claims, as amended by any amendment referred to above; THAT I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application in accordance with 37 C.F.R. 1.56(a) and 35 U.S.C 102, 103; and that applications for patent or inventor's certificate on this invention or discovery which have been filed by me or my legal representatives or assigns in any country foreign to the United States of America and, if filed within one year before this application, from which priority is claimed under 35 U.S.C. 119/365 are as follows:


United Kingdom Application No. 9923199.5 filed 1st October 1999

And I hereby appoint Nixon & Vanderhye whose address is Eighth Floor, 1100 North Glebe Road, Arlington, Virginia 22201-4714, USA (to whom all communications about this application are to be directed), and the below named partners (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent, and I hereby authorise them to act and rely on instructions from and to communicate with BTG INTERNATIONAL LIMITED and its employees and by whom I declare that I have consented after full disclosure to be represented unless/until I instruct Nixon & Vanderhye in writing to the contrary.

19 Leonard C. Mitchard, 29,009, Arthur R. Crawford, 25,327, Larry S. Nixon, 25,640, Robert A. Vanderhye, 27,076, James T. Hosmer, 30,148, Robert W. Faris, 31,352, Michael J. Keenan, 32,106, Mark E. Nusbaum, 32,348, Richard G. Besha, 22,770, Bryan H. Davidson, 30,251, Stanley C. Spooner, 27,393, Duane M. Byers, 33,363, Paul J. Henon, 33,626, Jeffry H. Nelson, 30,481, John R. Lastova, 33,149, H. Warren Burnam Jr, 29,366, Thomas E. Byrne, 32,205, Mary J. Wilson, 32,955, J. Scott Davidson, 33,489


I declare further that all statements made herein of own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.




1-00   
Andrew Nicholas Dames,  
a British subject


Date:

25 April 2002

Residence and Post Office address: 74 De Freville Avenue, Cambridge, CB4 1HU, England 

2-00   
James Mark Carson England,  
a British subject

Date:

Residence and Post Office address: 44a Butt Lane, Milton, Cambridge, CB4 6DG, England 

143954

**APPLICATION FOR UNITED STATES PATENT**  
**Declaration and Power of Attorney**

As a below named inventor, I hereby declare: THAT my residence, post office address and citizenship are as stated below next to my name; THAT I verily believe I am an original, joint inventor of the invention entitled: MAGNETIC TAGS described and claimed in the attached specification; THAT I have reviewed and understand the contents of the above identified specification, including (to the best of my ability) the claims, as amended by any amendment referred to above; THAT I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application in accordance with 37 C.F.R 1.56(a) and 35 U.S.C 102, 103; and that applications for patent or inventor's certificate on this invention or discovery which have been filed by me or my legal representatives or assigns in any country foreign to the United States of America and, if filed within one year before this application, from which priority is claimed under 35 U.S.C. 119/365 are as follows:

United Kingdom Application No. 9923199.5 filed 1st October 1999

And I hereby appoint Nixon & Vanderhye whose address is Eighth Floor, 1100 North Glebe Road, Arlington, Virginia 22201-4714, USA (to whom all communications about this application are to be directed), and the below named partners (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent, and I hereby authorise them to act and rely on instructions from and to communicate with BTG INTERNATIONAL LIMITED and its employees and by whom I declare that I have consented after full disclosure to be represented unless/until I instruct Nixon & Vanderhye in writing to the contrary.

Leonard C. Mitchard, 29,009, Arthur R. Crawford, 25,327, Larry S. Nixon, 25,640, Robert A. Vanderhye, 27,076, James T. Hosmer, 30,148, Robert W. Faris, 31,352, Michael J. Keenan, 32,106, Mark E. Nusbaum, 32,348, Richard G. Besha, 22,770, Bryan H. Davidson, 30,251, Stanley C. Spooner, 27,393, Duane M. Byers, 33,363, Paul J. Henon, 33,626, Jeffry H. Nelson, 30,481, John R. Lastova, 33,149, H. Warren Burnam Jr, 29,366, Thomas E. Byrne, 32,205, Mary J. Wilson, 32,955, J. Scott Davidson, 33,489


I declare further that all statements made herein of own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

Date:

\_\_\_\_\_  
Andrew Nicholas Dames,  
a British subject

Residence and Post Office address: 74 De Freville Avenue, Cambridge, CB4 1HU, England

Date:

  
\_\_\_\_\_  
James Mark Carson England,  
a British subject

Residence and Post Office address: 44a Butt Lane, Milton, Cambridge, CB4 6DG, England